


KBB Series - Back Bar Coolers

KBB-UB-24-48G

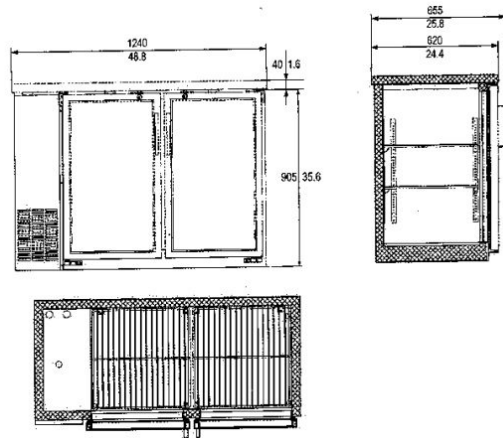


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1240 / 48 7/8" 620 / 24 3/8"	11.8ft	1/5	2.88	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - Back Bar Coolers

KBB-UB-24-60G

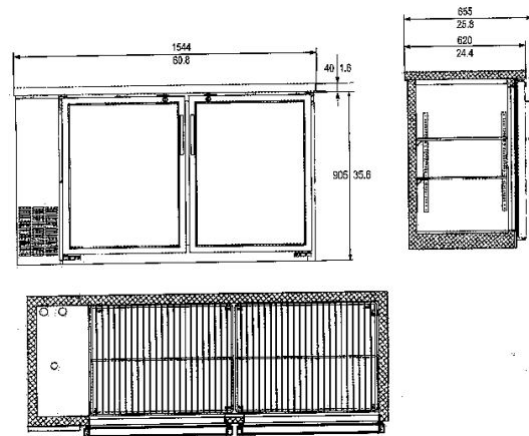


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1544 / 60 3/4" 620 / 24 3/8"	15.8ft	1/5	2.88	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - Back Bar Coolers

KBB-UB-24-72G

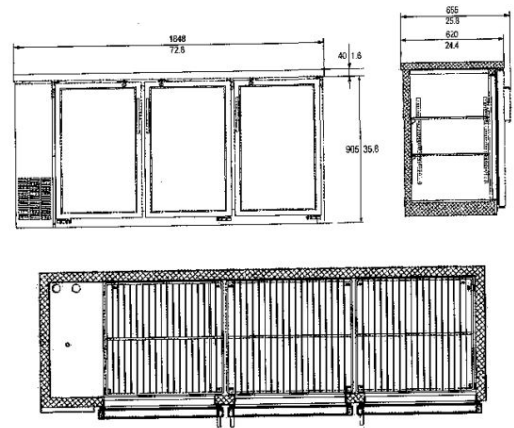


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
3	6	905 / 35 5/8" 1848 / 72 3/4" 620 / 24 3/8"	19.6ft	1/4+	3.96	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - Back Bar Coolers

KBB-24-48

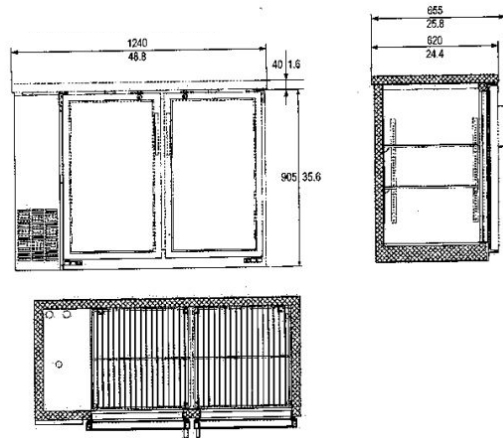


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1240 / 48 7/8" 620 / 24 3/8"	11.8ft	1/5	2.88	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - Back Bar Coolers

KBB-24-60

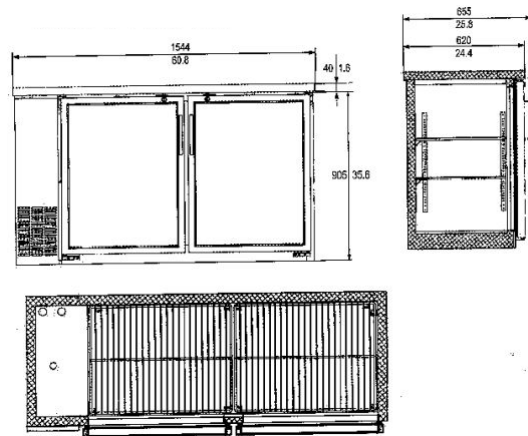


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35" 1544 / 60 ³ / ₄ " 620 / 24 ³ / ₈ "	15.8ft	1/5	2.88	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - Back Bar Coolers

KBB-24-72

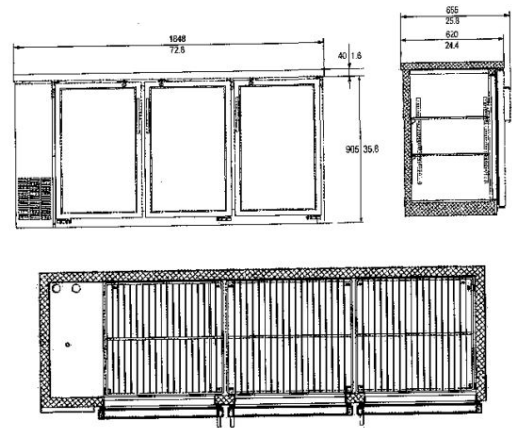


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
3	6	905 / 35 5/8" 1848 / 72 3/4" 620 / 24 3/8"	19.6ft	1/4+	3.96	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KDD Series - Direct Draft Keg Cooler

KDD-24-48

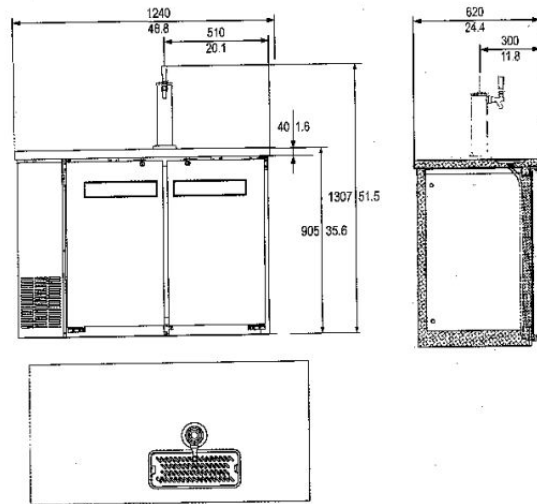




Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1240 / 48 7/8" 620 / 24 3/8"	11.8ft	1/5	3	115/60/1	NEMA 5-15P

- Durable stainless steel top, interior walls, floor and ceiling
- Two shelves included for optional bottle or can storage for increased versatility
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Two self-closing, locking doors to protect inventory
- LED interior lighting
- Includes (2) "D" system couplers
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant
- Included 16" x 3" draft arm



KDD Series - Direct Draft Keg Cooler

KDD-24-60

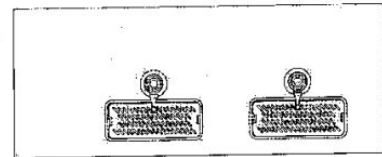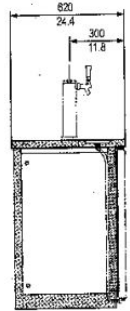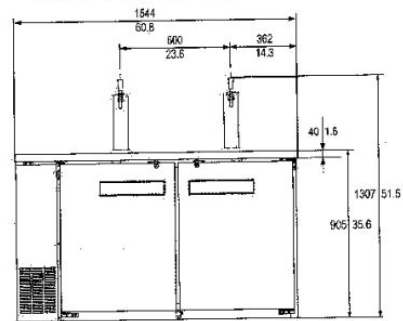


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1544 / 60 3/4" 620 / 24 3/8"	15.8ft	1/5	3	115/60/1	NEMA 5-15P

- Durable stainless steel top, interior walls, floor and ceiling
- Two shelves included for optional bottle or can storage for increased versatility
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Two self-closing, locking doors to protect inventory
- LED interior lighting
- Includes (2) "D" system couplers
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant
- Included 16" x 3" draft arm



KDD Series - Direct Draft Keg Cooler

KDD-24-72

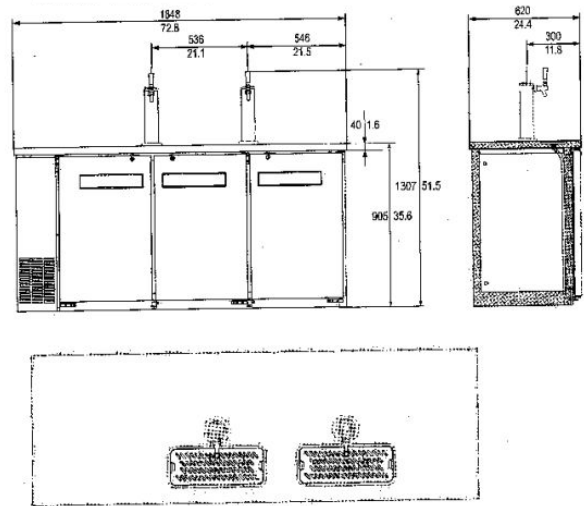


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
3	6	905 / 35 5/8" 1848 / 72 3/4" 620 / 24 3/8"	19.6ft	1/4+	4	115/60/1	NEMA 5-15P

- Durable stainless steel top, interior walls, floor and ceiling
- Two shelves included for optional bottle or can storage for increased versatility
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Two self-closing, locking doors to protect inventory
- LED interior lighting
- Includes (2) "D" system couplers
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant
- Included 16" x 3" draft arm



KDD Series - Direct Draw Beer Dispenser

KDD-1

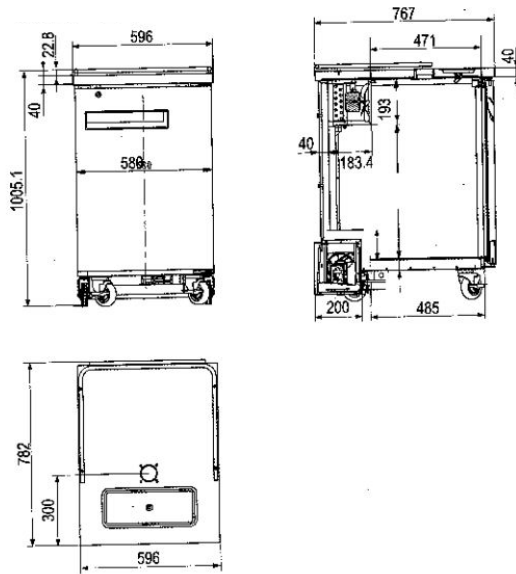


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
1	1	983 / 38 3/4" 596 / 23 1/2" 772 / 30 3/8"	6.5ft	1/6	1.92	115/60/1	NEMA 5-15P

- Durable stainless steel top, interior walls, floor and ceiling
- Two shelves included for optional bottle or can storage for increased versatility
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Two self-closing, locking doors to protect inventory
- LED interior lighting
- Includes (2) "D" system couplers
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant
- Included 16" x 3" draft arm



KDD Series - Direct Draw Beer Dispenser

KDD-2

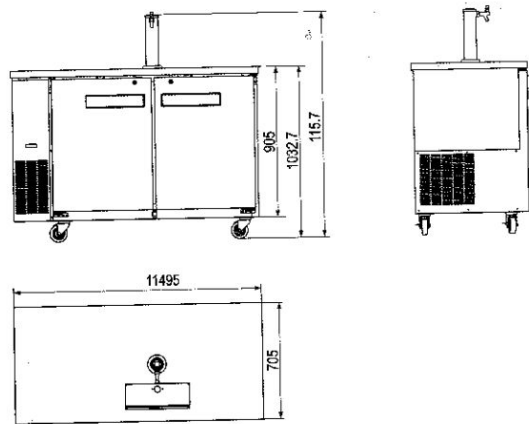


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1495 / 58 7/8" 705 / 27 3/4"	19ft	1/5	2.88	115/60/1	NEMA 5-15P

- Durable stainless steel top, interior walls, floor and ceiling
- Two shelves included for optional bottle or can storage for increased versatility
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Two self-closing, locking doors to protect inventory
- LED interior lighting
- Includes (2) "D" system couplers
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant
- Included 16" x 3" draft arm



KDD Series - Direct Draw Beer Dispenser

KDD-3

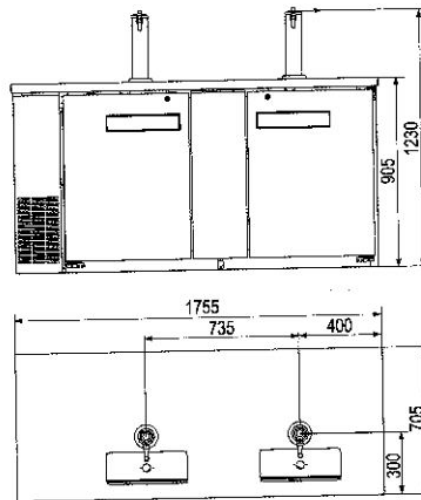


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1755 / 69 1/8" 705 / 27 3/4"	23.3ft	1/5	3.6	115/60/1	NEMA 5-15P

- Durable stainless steel top, interior walls, floor and ceiling
- Two shelves included for optional bottle or can storage for increased versatility
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Two self-closing, locking doors to protect inventory
- LED interior lighting
- Includes (2) "D" system couplers
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant
- Included 16" x 3" draft arm



KDD Series - Direct Draw Beer Dispenser

KDD-4

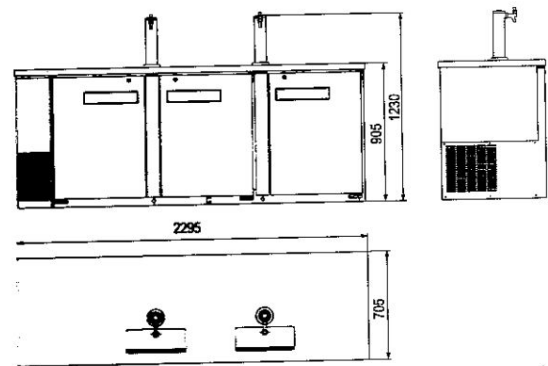

Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
3	6	905 / 35 5/8" 2295 / 90 3/8" 705 / 27 3/4"	32ft	1/4+	4.7	115/60/1	NEMA 5-15P

- Durable stainless steel top, interior walls, floor and ceiling
- Two shelves included for optional bottle or can storage for increased versatility
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Two self-closing, locking doors to protect inventory
- LED interior lighting
- Includes (2) "D" system couplers
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant
- Included 16" x 3" draft arm



KBB Series - 27" Back Bar Coolers

KBB-1G




Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
1	1	983 / 38 3/4" 596 / 23 1/2" 772 / 30 3/8"	6.5ft	1/6	1.92	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - 27" Back Bar Coolers

KBB-2G

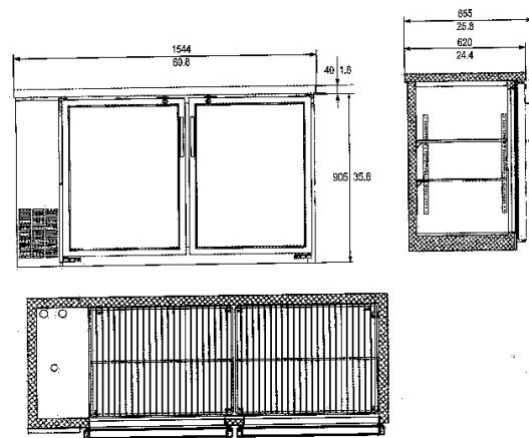


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1495 / 58 7/8" 705 / 27 3/4"	19ft	1/5	2.88	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - Back Bar Coolers

KBB-3G

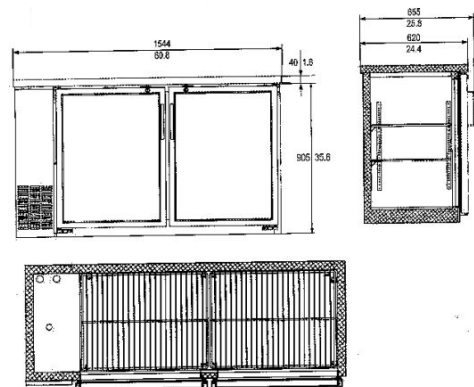


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1755 / 69 1/8" 705 / 27 3/4"	23.3ft	1/5	3.6	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - Back Bar Coolers

KBB-4G

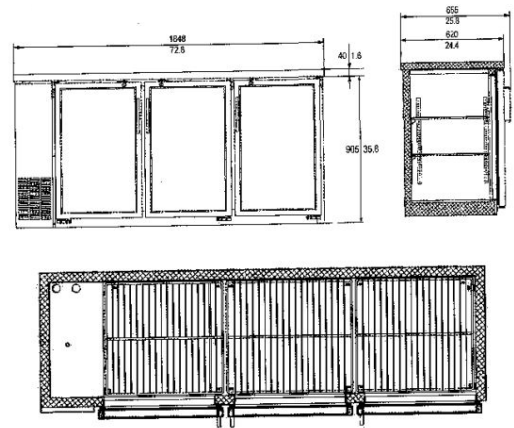

Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
3	6	905 / 35 5/8" 2295 / 90 3/8" 705 / 27 3/4"	32ft	1/4+	4.7	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - 27" Back Bar Coolers

KBB-1F




Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
1	1	983 / 38 3/4" 596 / 23 1/2" 772 / 30 3/8"	6.5ft	1/6	1.92	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - 27" Back Bar Coolers

KBB-2F

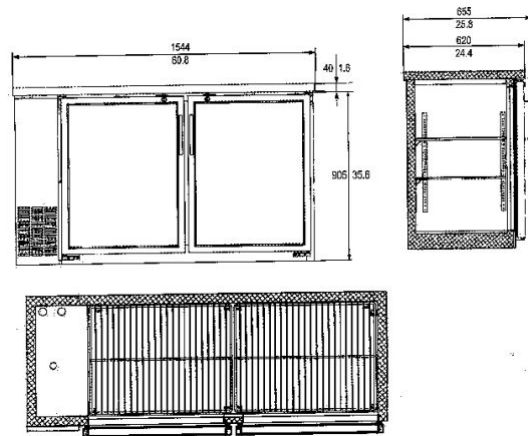


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1495 / 58 7/8" 705 / 27 3/4"	19ft	1/5	2.88	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - 27" Back Bar Coolers

KBB-3F

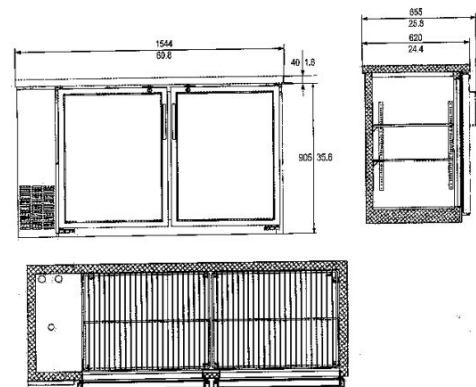


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	4	905 / 35 5/8" 1755 / 69 1/8" 705 / 27 3/4"	23.3ft	1/5	3.6	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KBB Series - 27" Back Bar Coolers

KBB-4F

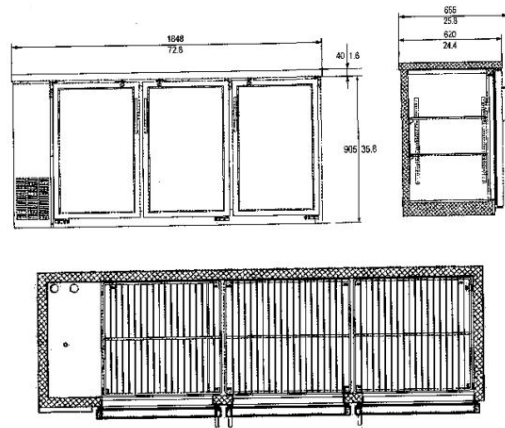


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
3	6	905 / 35 5/8" 2295 / 90 3/8" 705 / 27 3/4"	32ft	1/4+	4.7	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KGC Series - Horizontal Bottle Cooler

KGC-25

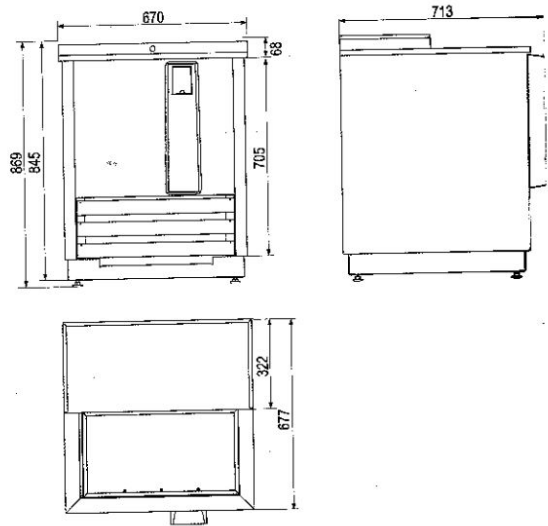


Lids	Dimensions - LxWxD mm / in	Capacity 12 oz. Blts	Capacity 12 oz Cans	HP	AMPS	Voltage	Plug Type
1	869 / 34 1/4" 670 / 26 3/8" 713 / 28 3/8"	4.5	6	1/6	2.04	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish
- Refrigeration system keeps food at safe temperatures between 0.5°C to 3.3°C
- Removable bottle cap opener and cap catcher included
- Option of stainless steel exterior available
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KGC Series - Horizontal Bottle Cooler

KGC-50

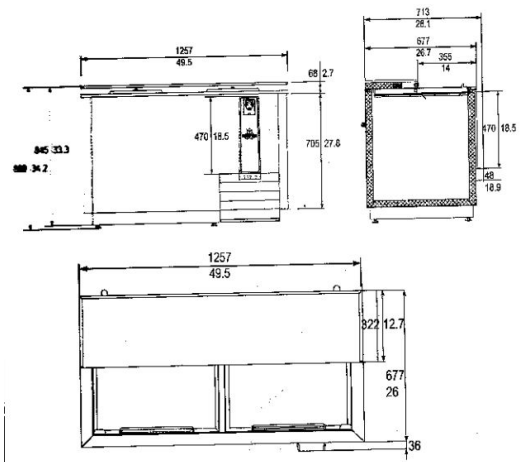


Lids	Dimensions - LxWxD mm / in	Capacity 12 oz. Blts	Capacity 12 oz Cans	HP	AMPS	Voltage	Plug Type
2	869 / 34 1/4" 1257 / 49 1/2" 713 / 26 5/8"	16.5	24	1/6	2.28	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish
- Refrigeration system keeps food at safe temperatures between 0.5°C to 3.3°C
- Removable bottle cap opener and cap catcher included
- Option of stainless steel exterior available
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KGC Series - Horizontal Bottle Cooler

KGC-65

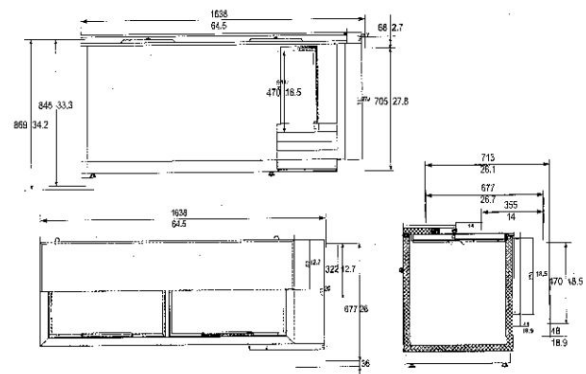


Lids	Dimensions - LxWxD mm / in	Capacity 12 oz. Blts	Capacity 12 oz Cans	HP	AMPS	Voltage	Plug Type
2	869 / 34 1/4" 1638 / 64 1/2" 713 / 26 5/8"	22	32	1/6	2.6	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish
- Refrigeration system keeps food at safe temperatures between 0.5°C to 3.3°C
- Removable bottle cap opener and cap catcher included
- Option of stainless steel exterior available
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KGC Series - Horizontal Bottle Cooler

KGC-95

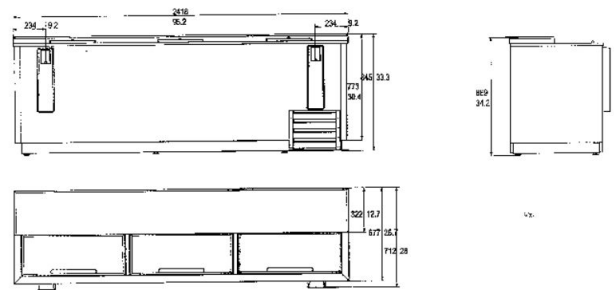


Lids	Dimensions - LxWxD mm / in	Capacity 12 oz. Blts	Capacity 12 oz Cans	HP	AMPS	Voltage	Plug Type
2	869 / 34 1/4" 2418 / 95 1/2" 713 / 26 5/8"	37.5	55	1/4+	4.2	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish
- Refrigeration system keeps food at safe temperatures between 0.5°C to 3.3°C
- Removable bottle cap opener and cap catcher included
- Option of stainless steel exterior available
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KGF Series - Glass Froster

KGF-25

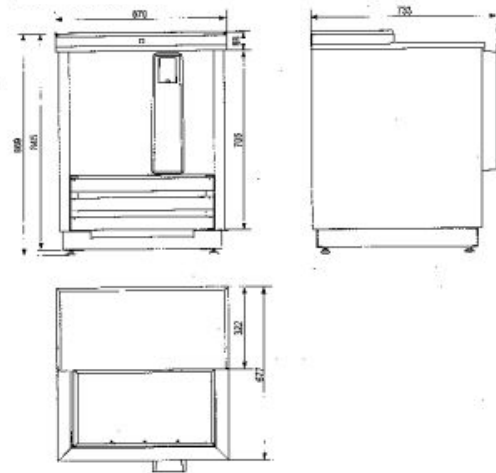


Lids	Dimensions - LxWxD mm / in	Capacity 8" (204mm)	Capacity 10 oz.	HP	AMPS	Voltage	Plug Type
1	869 / 34 1/4" 670 / 26 3/8" 677 / 26 5/8"	90	85	1/5	2.04	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish
- Refrigeration system keeps glasses/plates at safe temperatures between -18°C to -22°C
- Removable bottle cap opener and cap catcher included
- Option of stainless steel exterior available
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



KGF Series - Glass Froster

KGF-50

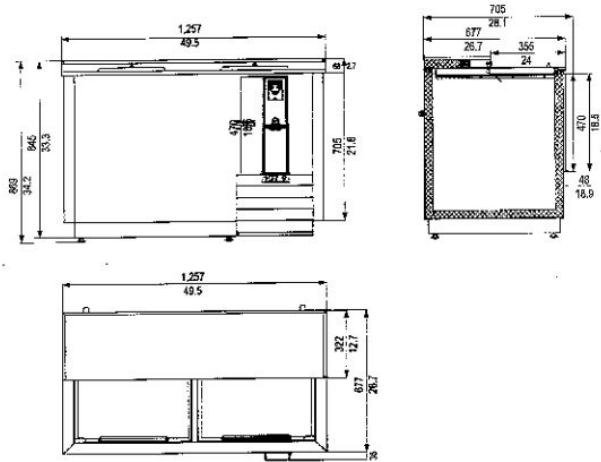

Lids	Dimensions - LxWxD mm / in	Capacity 8" (204mm)	Capacity 10 oz.	HP	AMPS	Voltage	Plug Type
2	869 / 34 1/4" 1257 / 49 1/2" 677 / 26 5/8"	250	240	1/4+	3	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Exterior construction is attractive corrosion resistant vinyl on steel in black finish
- Refrigeration system keeps glasses/plates at safe temperatures between -18°C to -22°C
- Removable bottle cap opener and cap catcher included
- Option of stainless steel exterior available
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

