

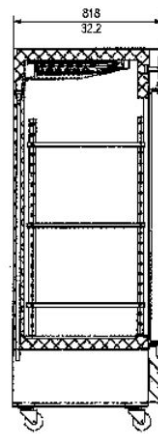


# KR-S/S Series - Reach-In Solid Door Refrigerators

## K29R-S/S

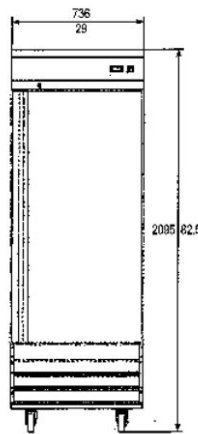


| Doors | Shelves | Dimensions - LxWxD mm / in                   | Capacity | HP  | AMPS | Voltage  | Plug Type  |
|-------|---------|--|----------|-----|------|----------|------------|
| 1     | 3       | 2095 / 82 1/2"<br>736 / 29"<br>818 / 32 1/4" | 23 ft    | 1/5 | 2.6  | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



# KR-S/S Series - Reach-In Solid Door Refrigerators

## K54R-S/S

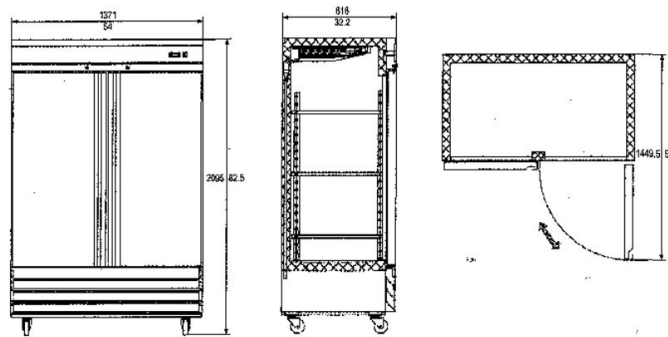


| Doors | Shelves | Dimensions - LxWxD mm / in                | Capacity | HP | AMPS | Voltage  | Plug Type  |
|-------|---------|---|----------|----|------|----------|------------|
| 2     | 6       | 2095 / 82 ½"<br>1371 / 54"<br>818 / 32 ¼" | 47 ft    | ¼+ | 3.8  | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



# KR-S/S Series - Reach-In Solid Door Refrigerators

## K81R-S/S

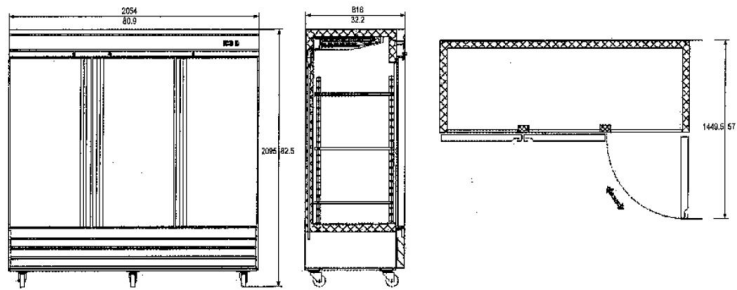


| Doors | Shelves | Dimensions - LxWxD mm / in                         | Capacity | HP  | AMPS | Voltage  | Plug Type  |
|-------|---------|--|----------|-----|------|----------|------------|
| 3     | 9       | 2095 / 82 1/2"<br>2054 / 80 9/10"<br>818 / 32 1/4" | 72 ft    | 3/4 | 9    | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



# KF-S/S Series - Reach-In Solid Door Freezers

## K29F-S/S

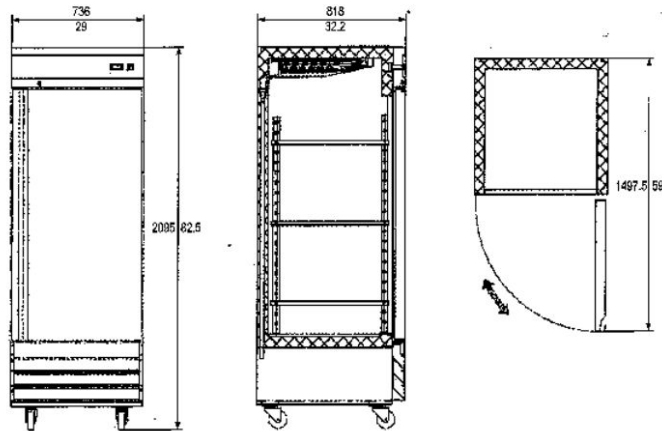


| Doors | Shelves | Dimensions - LxWxD mm                    | Capacity | HP | AMPS | Voltage  | Plug Type  |
|-------|---------|--|----------|----|------|----------|------------|
| 1     | 3       | 2095 / 82 ½"<br>736 / 29"<br>818 / 32 ¼" | 23 ft    | ½+ | 7.1  | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between -22°C to -18°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant




# KF-S/S Series - Reach-In Solid Door Freezers

## K54F-S/S

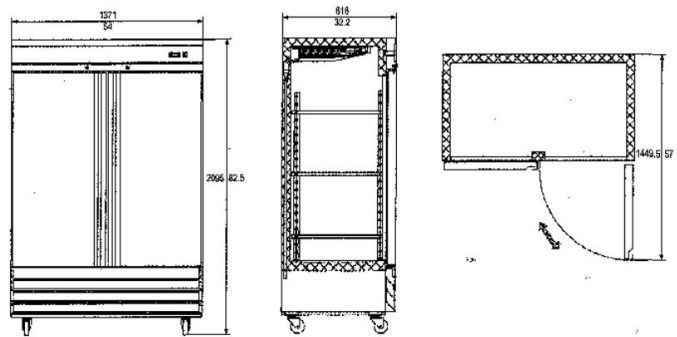


| Doors | Shelves | Dimensions - LxWxD mm                         | Capacity | HP | AMPS | Voltage  | Plug Type  |
|-------|---------|---|----------|----|------|----------|------------|
| 2     | 6       | 2095 / 82 1/2"<br>1371 / 54"<br>818 / 32 1/4" | 47 ft    | 1  | 10.7 | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between -22°C to -18°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

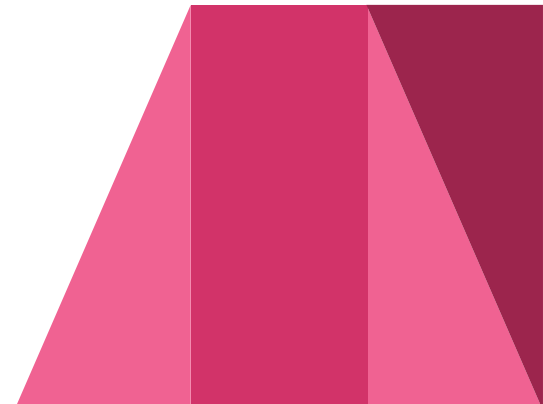

# KF-S/S Series - Reach-In Solid Door Freezers

## K81F-S/S

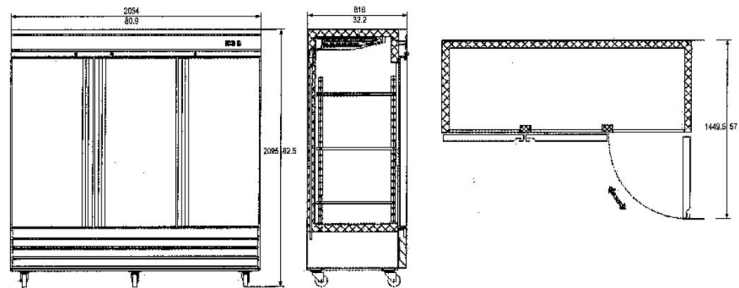


| Doors | Shelves | Dimensions - LxWxD mm                              | Capacity | HP    | AMPS | Voltage  | Plug Type  |
|-------|---------|--|----------|-------|------|----------|------------|
| 3     | 9       | 2095 / 82 1/2"<br>2054 / 80 9/10"<br>818 / 32 1/4" | 72 ft    | 1 1/4 | 12   | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between -22°C to -18°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



# UR-S/S Series - Economic Reach-In Solid Door Refrigerators

## U-19R-S/S

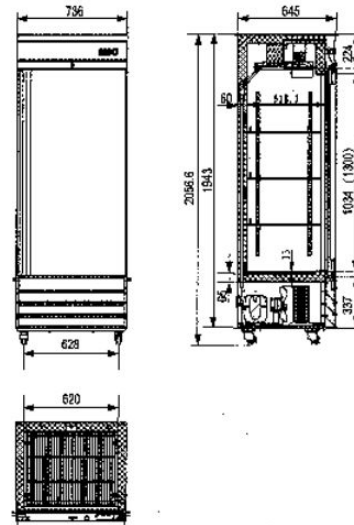


| Doors | Shelves | Dimensions - LxWxD mm                        | Capacity | HP  | AMPS | Voltage  | Plug Type  |
|-------|---------|--|----------|-----|------|----------|------------|
| 1     | 3       | 2095 / 82 1/2"<br>645 / 29"<br>736 / 25 3/8" | 19 ft    | 1/5 | 2.8  | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



# UF-S/S Series - Economic Reach-In Solid Door Freezers

## U-19F-S/S

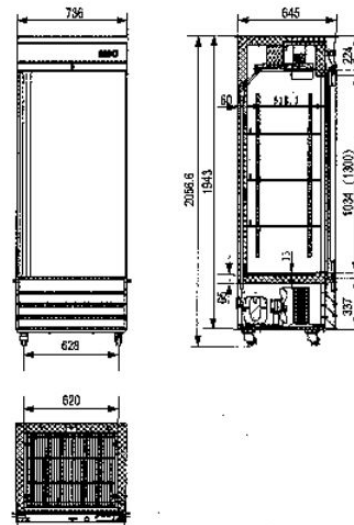

| Doors | Shelves | Dimensions - LxWxD mm                        | Capacity | HP  | AMPS | Voltage  | Plug Type  |
|-------|---------|--|----------|-----|------|----------|------------|
| 1     | 3       | 2095 / 82 1/2"<br>645 / 29"<br>736 / 25 3/8" | 19 ft    | 1/5 | 2.8  | 115/60/1 | NEMA 5-15P |


- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between -22°C to -18°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant





# KR-S/S-G Series - Reach-In Solid Door Refrigerators

## K29R-S/S-G

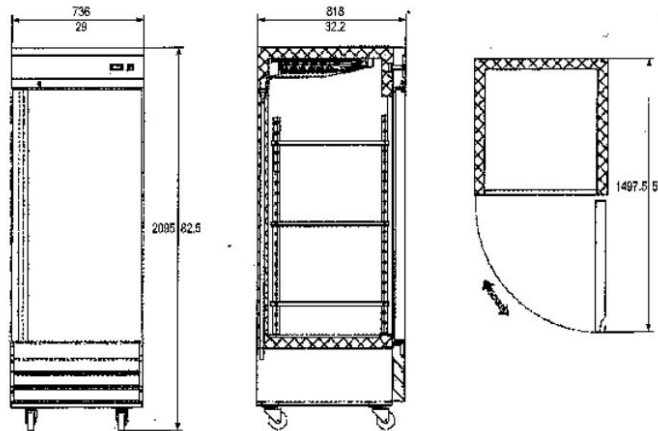




| Doors | Shelves | Dimensions - LxWxD mm / in                   | Capacity | HP  | AMPS | Voltage  | Plug Type  |
|-------|---------|--|----------|-----|------|----------|------------|
| 1     | 3       | 2095 / 82 1/2"<br>736 / 29"<br>818 / 32 1/4" | 23 ft    | 1/5 | 2.6  | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



# KR-S/S-G Series - Reach-In Solid Door Refrigerators

## K54R-S/S-G




| Doors | Shelves | Dimensions - LxWxD mm / in                    | Capacity | HP   | AMPS | Voltage  | Plug Type  |
|-------|---------|---|----------|------|------|----------|------------|
| 2     | 6       | 2095 / 82 1/2"<br>1371 / 54"<br>818 / 32 1/4" | 47 ft    | 1/4+ | 3.8  | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant



# KR-S/S-G Series - Reach-In Solid Door Refrigerators

## K81R-S/S-G

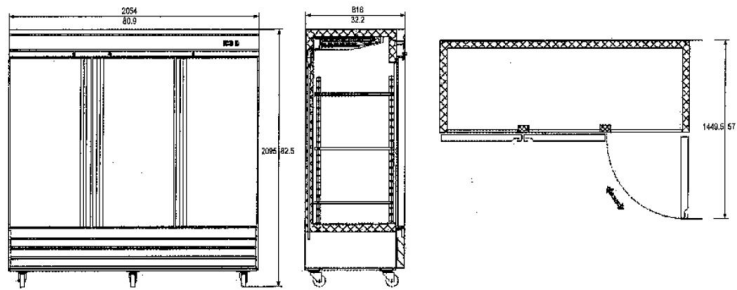

| Doors | Shelves | Dimensions - LxWxD mm / in                     | Capacity | HP  | AMPS | Voltage  | Plug Type  |
|-------|---------|--|----------|-----|------|----------|------------|
| 3     | 9       | 2095 / 82 ½"<br>2054 / 80 9/10"<br>818 / 32 ¼" | 72 ft    | 3/4 | 9    | 115/60/1 | NEMA 5-15P |

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

