


#### KSSU27-6/2










Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	НР	AMPS	Voltage	Plug Type
1	1	1075 / 42 %" 750 / 27 ½" 698 / 29 ½"	5.7ft	1/5	2.88	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU36-10



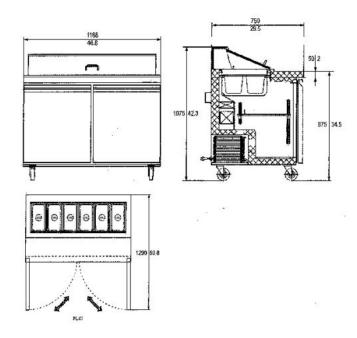



Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	2	1075 / 42 ¾" 920 / 36 ¼" 750 / 29 ½"	7.6ft	1/5	3.24	115/60/1	NEMA 5-15P


- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU48-12











Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	НР	AMPS	Voltage	Plug Type
2	2	1075 / 42 %" 1188 / 46 %" 750 / 29 ½"	9.5ft	1/4+	4.56	115/60/1	NEMA 5-15P


- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU60-16










Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	2	1075 / 42 ¾" 1529 / 60 ¼" 750 / 29 ½"	15ft	1/4+	4.8	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU72-18







Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
3	3	1075 / 42 %" 1787 / 70 %" 750 / 29 ½"	15.5ft	3/4	8.9	115/60/1	NEMA 5-15P


- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU27-9/3










Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	НР	AMPS	Voltage	Plug Type
1	1	1166 / 45 9/10" 698 / 27 ½"	5.7ft	1/5	2.88	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU36-15






Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	2	1166 / 45 9/10" 920 / 36 ¼" 864 / 34"	7.6ft	1/5	3.24	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU48-18





Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	2	1166 / 45 9/10" 1188 / 46 %" 864 / 34"	9.5ft	1/4+	4.56	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU60-24




Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	2	1166 / 45 9/10" 1529 / 60 %" 750 / 34"	15ft	1/4+	4.8	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

#### KSSU72-30






Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	НР	AMPS	Voltage	Plug Type
3	3	1166 / 45 9/10" 1787 / 70 %" 864 / 34"	15.5ft	3/4	8.9	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

### **KPP Series - Pizza Prep Tables**

#### **KPP-49-6**

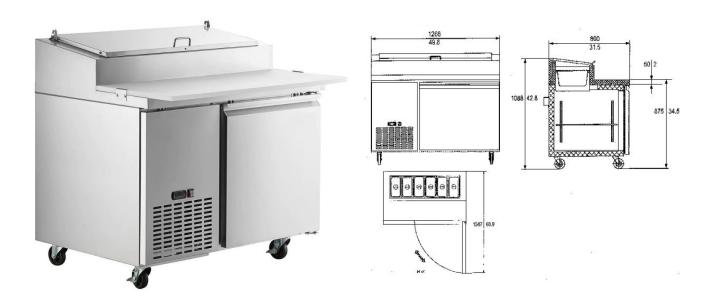


Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
1	1	1088 / 42 %" 1266 / 49 %" 800 / 31 ½"	13.8ft	1/6	2.64	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

### **KPP Series - Pizza Prep Tables**

#### **KPP72-9**

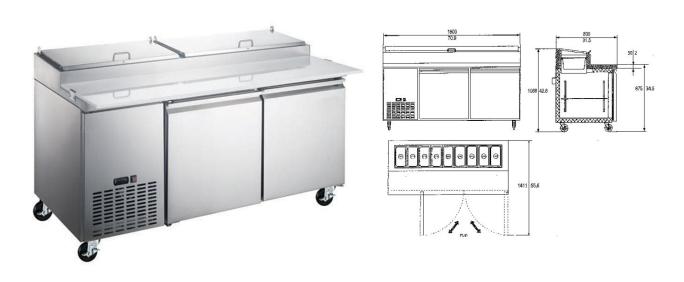

Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	2	1088 / 42 %" 1800 / 70 9/10" 800 / 31 ½"	16.9ft	1/5	3.42	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

### **KPP Series - Pizza Prep Tables**

#### **KPP93-12**




Doors	Shelves	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
3	3	1088 / 42" 2334 / 91 9/10" 800 / 31 ½"	24.2ft	1/4+	5.28	115/60/1	NEMA 5-15P

- Stainless steel interior and exterior sides, aluminum back.
- Refrigeration system keeps food at safe temperatures between 0.5°C to 5°C
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 90 lb. capacity each
- Digital temperature controller with automatic defrost function
- Cutting board variable between removable and riveted
- Preinstalled heavy duty casters with brakes
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

### KCB Series - Chef Bases

#### KCB-36-2






Drawers	GN Pans	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	2*1/1+6* 1/6	645 / 25 %" 924 / 36 %" 816 / 32 %"	5.9ft	1/6	2.52	115/60/1	NEMA 5-15P

- Stainless steel exterior and interior; foamed-in-place polyurethane insulation
- Stainless steel top with marine edge
- 880 lb. weight capacity
- Each drawer holds 1 full size and (3) 1/6 size food pans, 4" deep
- Heavy duty pull handles
- Maintains temperatures between 0.5°C 5°C
- Removable installation board for convenient cleaning and service
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

### KCB Series - Chef Bases

#### KCB-52-2






Drawers	GN Pans	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
2	6*1/1	645 / 25 %" 1318 / 51 %" 816 / 32 %"	9.9ft	1/6	3.48	115/60/1	NEMA 5-15P

- Stainless steel exterior and interior; foamed-in-place polyurethane insulation
- Stainless steel top with marine edge
- 880 lb. weight capacity
- Each drawer holds 1 full size and (3) 1/6 size food pans, 4" deep
- Heavy duty pull handles
- Maintains temperatures between 0.5°C 5°C
- Removable installation board for convenient cleaning and service
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant

### KCB Series - Chef Bases

#### KCB-72-4

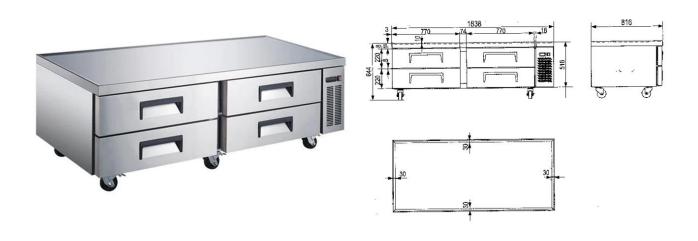

Drawers	GN Pans	Dimensions - LxWxD mm / in	Capacity	HP	AMPS	Voltage	Plug Type
4	8*1/1	645 / 25 %" 1839 / 72 %" 816 / 32 %"	15ft	1/5	4.68	115/60/1	NEMA 5-15P

- Stainless steel exterior and interior; foamed-in-place polyurethane insulation
- Stainless steel top with marine edge
- 880 lb. weight capacity
- Each drawer holds 1 full size and (3) 1/6 size food pans, 4" deep
- Heavy duty pull handles
- Maintains temperatures between 0.5°C 5°C
- Removable installation board for convenient cleaning and service
- Eco-friendly & efficient Hydro-Carbon R290 refrigerant